


Data sheet

Part No.	FXP Turbo BK UV
Description	pliable conduit, corrugated, with sectional corrugation medium compression resistance, medium impact resistance
Colour	black, similar to RAL 9005
Fire Behaviour	non flame propagating
Classification	33412
Compression resistance	> 750 N



Standard: EN 61386-1, EN 61386-22

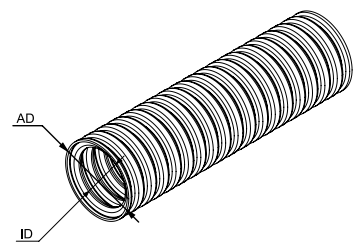

Compressive strength	Impact strength	Operating temperature	Bending strength	UV resistant
Medium (class 3)	Medium (class 3)	-25 to +60 °C	Pliable	true – up to 10 years

Art. no.	AD	ID	Bending radius	ps	pl
098 772	16 mm	10,7 mm	80 mm	50 m	2700 m
084 057	20 mm	14,1 mm	100 mm	50 m	2700 m
084 058	25 mm	17,8 mm	125 mm	50 m	1600 m
098 773	32 mm	23,6 mm	160 mm	25 m	675 m
098 774	40 mm	31,1 mm	200 mm	25 m	500 m
098 775	50 mm	39,4 mm	250 mm	25 m	300 m
098 776	63 mm	52,1 mm	315 mm	25 m	175 m

Areas of Recommended Application

Area	
Flush mounted (plaster)	True
Surface mounted	True
Suitable for concrete installation	True
Machine and systems installation	True
Suitable for subsurface installation (screed)	True
Outdoor installation	True
Suitable for installation on wood	True
Hollow wall	True
Underground installation	True

Further technical details

Details	
Halogen free	False
With sleeve	False
Fire retardant version	True
Material	PVC-U